


Tech Specs		Standard	Optional up to
Infeed	inch.	26	16,5
Outfeed	inch.	114	470
Capacity	p/hour.	450	650
Product	L x W inch.	23 x 15	47 x 23
Weight	Lb.	55	220




39 ft



220 Lbs



650 / h

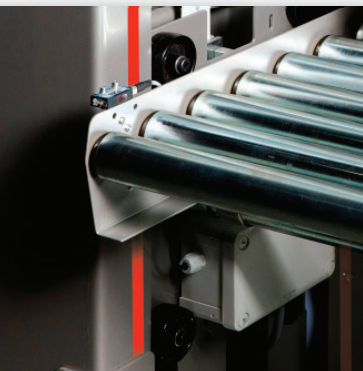

10 sq ft



Key Components for material handling:

- Safety Fencing
- Vertical Conveyors
- Palletising Modules

Customer: \_\_\_\_\_

E-mail: \_\_\_\_\_

Product: \_\_\_\_\_

Product sizes: ..... x ..... x ..... inch.

Capacity: min. .... p/min. max. .... p/min.

Product Weight: min. .... Lb. max. .... Lb.

Product orientation infeed: Short / Long Side Leading

Product orientation outfeed: Short / Long Side Leading

Product Infeed: ..... inch.

Product Outfeed: ..... inch.

Infeed conveyor: Driven / Gravity

Outfeed conveyor: Driven / Gravity

Field components included: Yes / No

Safety fencing included: Yes / No

Safety fencing door included: Yes / No

Operational: ..... / ..... | ..... / .....

Lay-out: Send to sales@sourcelinkcorp.net

Environment conditions: \_\_\_\_\_

Special remarks: \_\_\_\_\_



	ELEVATE	DESCEND
TOP		
BOTTOM		
Not possible: B1, B2, C3, C4, 5F, 6F, 7G, 8G		

Suitable for

- Carton Trays • Bins • Tires • Books • Cardboard boxes • Shrink wrapped products • Soft parcels • Magazines
- Newspaper bundles • Frozen foods • Trays • Packaged bottles • Boxes • Bags • Totes

" DISCLAIMER: this document is for informational en promotional only  
all orders are subject to the Qimarox terms and conditions and Qimarox's written confirmation. Copyright © 2013 Qimarox™ "